





JOB NAME: _____

Date: _____

TYPE: _____

LCR10 SERIES STANDARD LED FLAT PANEL

IMAGE & DIMENSION:

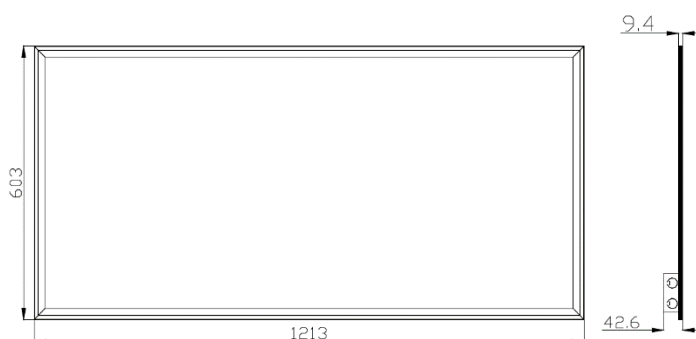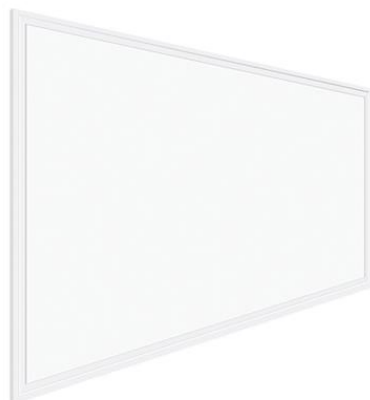

Variant	L	W	H
2' X 4'	47.76"	23.74"	0.37"

FEATURES AND SPECIFICATIONS

Designed for drop in ceilings and places with limited installation depths, Lucent industry flat panels are the best replacement for fluorescent fixtures. With a better light distribution, panels produce an even light that's more comfortable on the eyes. Emergency backup, surface mount kits and more accessories available

SKU	PRODUCT CODE	WATTS	SIZE	VOLTAGE	LUMENS	COLOR TEMP
LU13268-2	68-PL-612-50W-40K-D-S	50W	2'x4'	100-277V AC	4652.1 LM	4000K
LU13268-3	68-PL-612-50W-50K-D-S	50W	2'x4'	100-277V AC	5061.7 LM	5000K

3000K, 3500K, 4500K and 5700K are available on special order.

ELECTRICAL SPECIFICATIONS:

- Voltage: 100-277VAC 50/60Hz
- Wattages: 50W
- Power Factor: PF>0.90
- Hi-pot Test Range: SELV Isolated driver, 3750Vdc

LIGHTING SPECIFICATIONS:

- 0-10V Dimmable
- Luminous Efficiency: >105lm/w
- Color Temperature: 4000K, 5000K
- Color Rendering Index: >80Ra
- Beam Angle: 120°



JOB NAME: _____

Date: _____

TYPE: _____

HOUSING SPECIFICATIONS:


- Materials: Aluminum Frame & Frosted Diffuser
- Operating Temperature: -4°F ~+ 104°F
- Lifespan: 50,000Hrs
- IP Rating: IP40
- Storage Temp.: -22°F ~+ 140°F

SAFETY & EMC:

- Safety Norms: UL1598, UL8750, EN60598
- Electromagnetic Compatibility: EN55015, EN61000-2-3, EN61000-3-3, EN61547
- Gross Weight: 6.5kg/14.3lbs
- Quantity/Carton: 4pcs

WARRANTY: 5 years



CERTIFICATIONS: UL, DLC



ACCESSORIES:

SKU	Description	Image
LU13045-3	Cable Kit for 2x4 Flat Panel	
LU13903	Surface Mount Kit for 2x4 Panel	
LU86001	12w Emergency Backup	
LU13912	Flange Kit for 2x4 Flat Panel	

PHOTOMETRICS (2x4 50w):

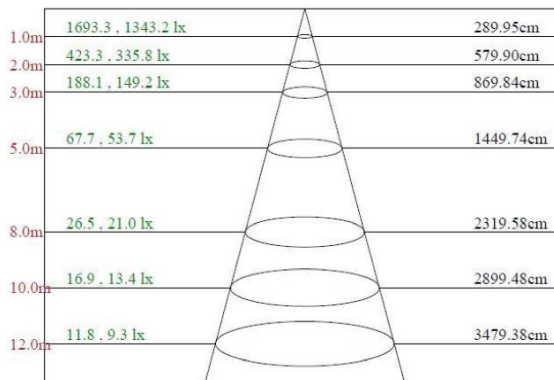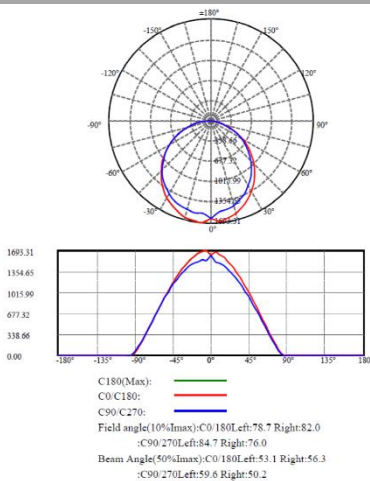

Max , Ave Beam angle of C180plane110.22