




JOB NAME: _____

Date: _____

TYPE: _____

KO11 Series 6" J-Box Round Recessed Downlight

IMAGE & DIMENSION:

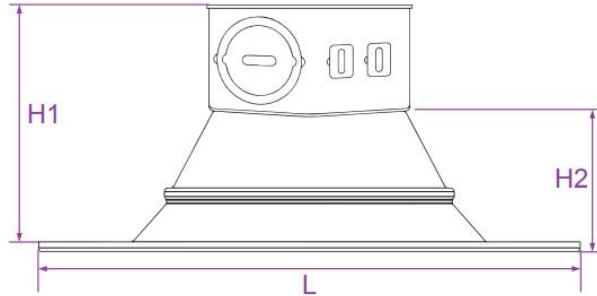

Variant	L	H ₁	H ₂
15W	7.36"	3.35"	1.81"

FEATURES AND SPECIFICATIONS

80% energy saving to incandescent/halogen bulbs. Art galleries, museums, homes, schools, offices, hotels, restaurants, retails stores and other commercial and industrial applications. Suitable for Damp Locations. No tools required for installation.

SKU	SIZE	WATTS	BEAM ANGLE	VOLTAGE	LUMENS	COLOR TEMP
LU10074-5	6"	15W	100°	120V AC	1200 LM	2700K
LU10074-1	6"	15W	100°	120V AC	1200 LM	3000K
LU10074-2	6"	15W	100°	120V AC	1200 LM	4000K
LU10074-3	6"	15W	100°	120V AC	1200 LM	5000K

ELECTRICAL SPECIFICATIONS:

- Voltage: 120VAC 50/60Hz
- Wattages: 15W
- Power Factor: PF>0.90

HOUSING SPECIFICATIONS:

- Materials: Aluminum
- Operating Temperature: -4°F ~+ 122°F
- Storage Temp.: -13°F ~+ 140°F
- IP Rating: IP40
- Lifespan: 50,000Hrs

WARRANTY: 5 Years

CERTIFICATIONS: ETL, Energy Star

LIGHTING SPECIFICATIONS:

- Triac Dimmable
- Luminous Efficiency: 80 lm/w
- CCT: 2700K/3000K/4000K/5000K
- Color Rendering Index: >90Ra
- Beam Angle: 100°
- LED Quantity: 14pcs

SAFETY & EMC:

- Luminaires [UL 1598:2018 Ed.4]
- Luminaires [CSA C22.2#250.0:2018 Ed.4]
- Gross Weight: 8.3kg/18.3lbs
- Quantity/Carton: 20pcs

